


HS-531 振动模块 四个输出

主要特点

- 封装的“g”输出
- RMS速度输出
- PLC的0-10V输出
- 缓冲加速输出（用于数据收集）
- TDX OK功能
- DIN导轨安装

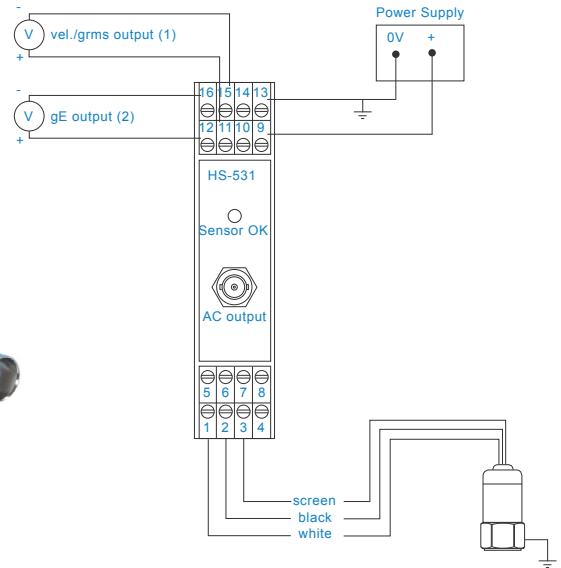

Technical Performance

Input	500 mV/g constant current accelerometer
Frequency Range	0.3 Hz to 2 kHz
gE Filters	Input Filters 200 Hz to 2 kHz (-3dB) 2-pole Butterworth Post-Envelope Filter 4 Hz to 100 Hz (-3dB) 2-pole Butterworth
Velocity Filters	0.3 Hz to 3 Hz (-3dB) 2-pole Butterworth

Mechanical

Case Material	Plastic
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	134 x 99 x 22.5 mm (HxDxW) including BNC
Connections	Screw Clamp
Conductor Size	0.5 to 4.0 mm
Weight	140 gms (nom)

Electrical

Power Input	+24 VDC at 25 mA (from HS-570 Power Supply Module)
Output 1	0-10 VDC = 0-6000 mm/s rms Velocity
Output 2	0-10 VDC = 0-0.2 gE (other ranges available)
Output 3 (via BNC)	Buffered acceleration output with DC bias voltage (nom. 12 VDC) AC only about 0 V on request
Output 4	Buffered gE AC output with 9 VDC Ref. Voltage
TDX OK	Transducer OK. Outputs held at 0 V if in fault

Environmental

Operating Temperature Range	0 to 55 °C
Installation Category (IEC664)	II
Equipment Class (IEC536)	III
EMC	EN61326-1:2013

How To Order

