

HS-130 Accelerometer


AC acceleration output via Flame Retardant Cable

Key Features


- For use with data collector
- Compact design
- Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



Connection Details



Technical Performance

| | |
|------------------------|--|
| Mounted Base Resonance | see 'How To Order' table (nominal) |
| Sensitivity | see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C |
| Frequency Response | 2Hz (120cpm) to 14kHz (840kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 16kHz (960kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 19kHz (1,140kcpm) $\pm 3dB$ |
| Isolation | Base isolated |
| Range | see: 'How To Order' table |
| Transverse Sensitivity | Less than 5% |

Mechanical

| | |
|------------------------------|---|
| Case Material | Stainless Steel |
| Sensing Element/Construction | PZT/Compression |
| Mounting Torque | 8Nm |
| Weight | 30gms (nominal) body only |
| Maximum Cable Length | 1000 metres |
| Standard Cable Length | 5 metres |
| Screened Cable | Flame Retardant - length to be specified with order |
| Mounting Threads | see: 'How To Order' table |


Electrical

| | |
|------------------|---------------------------|
| Electrical Noise | 0.1mg max |
| Current Range | 0.5mA to 8mA |
| Bias Voltage | 10 - 12 Volts DC |
| Settling Time | 2 seconds |
| Output Impedance | 200 Ohms max. |
| Case Isolation | $>10^8$ Ohms at 500 Volts |

Environmental

| | |
|-----------------------------|----------------|
| Operating Temperature Range | -40 to 100°C |
| Sealing | IP65 |
| Maximum Shock | 5000g |
| EMC | EN61326-1:2013 |


Typical Frequency Response (at 100mV/g)

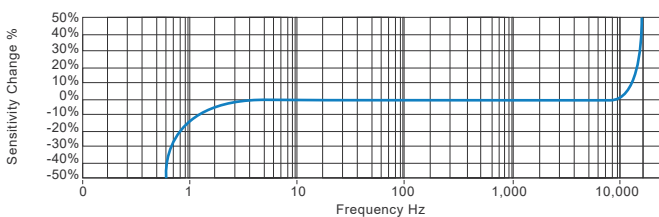

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

| Product Prefix | Product Series | Cable Length (if integral cable) | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------|-----------------------------------|----------------------------------|--------------|--------------|--------------------|---------------|-----------------|------------|------------|------------------|-----------|-----------|-----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------------|-------------------------|-----------------------|--------------------|-----------------------|
| HS - Hansford Sensors | 130 - Industrial Vibration Sensor | QXX - length specified in metres | | | | | | | | | | | | | | | | | | | | | | |
| H | S | 1 | 3 | 0 | X | X | X | X | X | X | X | X | X | X | | | | | | | | | | |
| Extra Options (if required) | | Sensitivity | | Range | Resonant Frequency | | Cable/Connector | | | Mounting Threads | | | | | | | | | | | | | | |
| Y - 5% tolerance on sensitivity | | 010 - 10mV/g | 030 - 30mV/g | 050 - 50mV/g | 100 - 100mV/g | 250 - 250mV/g | 500 - 500mV/g | $\pm 800g$ | $\pm 250g$ | $\pm 160g$ | $\pm 80g$ | $\pm 32g$ | $\pm 16g$ | 28kHz (1,680kcpm) | 26kHz (1,560kcpm) | 24kHz (1,440kcpm) | 22kHz (1,320kcpm) | 20kHz (1,200kcpm) | 18kHz (1,080kcpm) | 08 - Flame Retardant | 01 - 1/4-28" UNF Female | 02 - 1/4-28" UNF Male | 06 - M6 x 1mm Male | 08 - M8 x 1.25mm Male |



T: 150 210 98804

www.hansfordsensors.com.cn

汉施弗德传感器（上海）有限公司

