

# HS-150RT Premium Accelerometer


## AC acceleration and PT100 temperature output via M12 Connector

### Key Features

- Temperature output PT100
- Premium design
- Customisable features

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

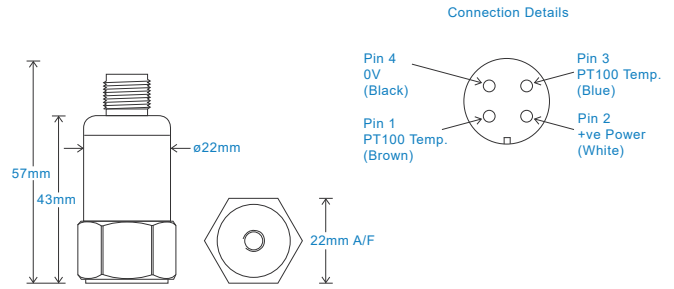

### Technical Performance

Mounted Base Resonance	see: 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$ 0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	PT100 (100 Ohms)
Transverse Sensitivity	Less than 5%

### Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


### Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

### Environmental

Operating Temperature Range	-55 to 150°C
Sealing	IP67
Maximum Shock	5000 g
EMC	EN61326-1:2013


### Typical Frequency Response (at 100mV/g)

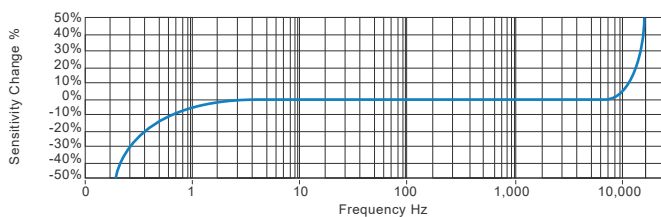

### Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



### How To Order

Product Prefix	Product Series											
HS - Hansford Sensors	150 - Premium Industrial Vibration Sensor											
<b>H</b>	<b>S</b>	<b>1</b>	<b>5</b>	<b>0</b>	<b>R</b>	<b>T</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Extra Options (if required)</b>				<b>Sensitivity</b>	<b>Range</b>	<b>Resonant Frequency</b>			<b>Cable/Connector</b>		<b>Mounting Threads</b>	
F - Filtered				010 - 10mV/g	$\pm 800g$	28kHz (1,680kcpm)			01 - PUR		01 - ¼-28" UNF Female	
L - 316L Stainless Steel				030 - 30mV/g	$\pm 250g$	26kHz (1,560kcpm)			54 - M12		02 - ¼-28" UNF Male	
RT - Temperature Output PT100				050 - 50mV/g	$\pm 160g$	24kHz (1,440kcpm)					05 - Quick Fit Female	
S - 90° Side Exit				100 - 100mV/g	$\pm 80g$	22kHz (1,320kcpm)					06 - M6 x 1mm Male	
Y - 5% tolerance on sensitivity				250 - 250mV/g	$\pm 32g$	20kHz (1,200kcpm)					08 - M8 x 1.25mm Male	
				500 - 500mV/g	$\pm 16g$	18kHz (1,080kcpm)					10 - M10 x 1.5mm Male	



T: 150 210 98804

[www.hansfordsensors.com.cn](http://www.hansfordsensors.com.cn)

汉施弗德传感器（上海）有限公司

