
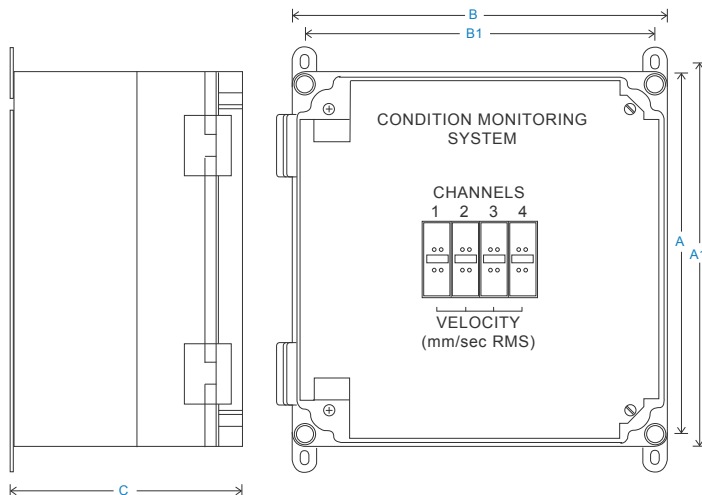


HS-580 模块盒

聚碳酸酯纤维材质

主要特点

- 隔离电源
- 适用于所有HS-500系列
- 短路保护
- 符合UL1310 II级的安全性

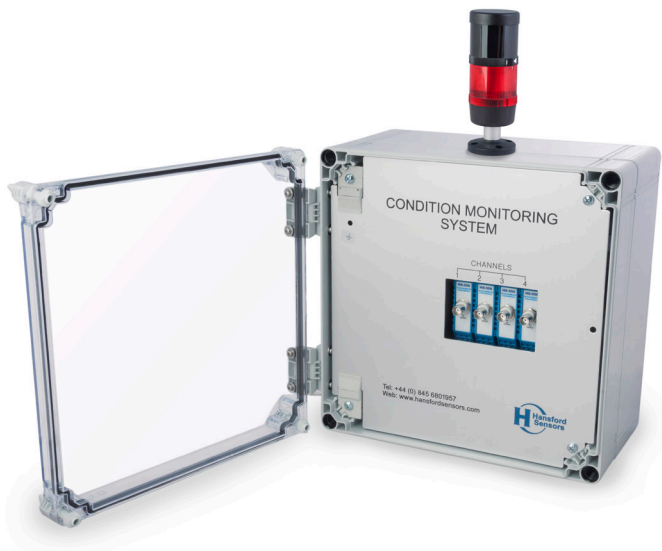


Technical Performance

Input Voltage Range	85 to 260 VAC
Output Voltage Range	24 VDC
Output Power	2 Amps
Case Material	Polycarbonate
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	see: 'How To Order' table
Connections	Screw Clamp
Conductor Size	0.5 to 4.0mm
Weight	260gms (nominal)

Environmental

Operating Temperature Range	0 to 55°C
Sealing	IP66 (excluding fans)
Cooling	Two fans
Relative Humidity	20 to 90% RH
EMC	EN61326-1:2013
Installation Category (IEC664)	II
Equipment Class (IEC536)	III

How To Order

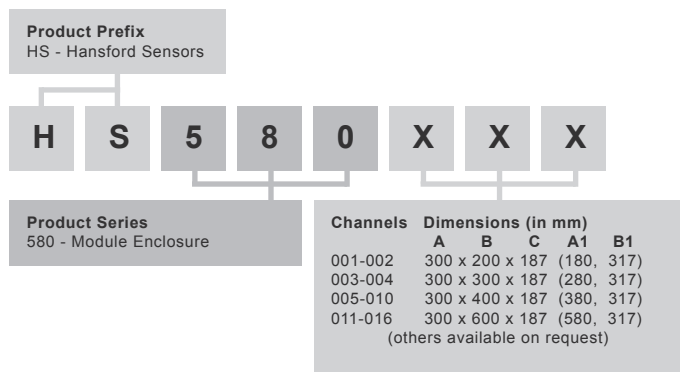

Accessories

- HS-590 - Flashing Beacon & Siren Module
- HS-591 - Flashing Beacon
- HS-592 - Siren Module



T: 150 210 98804

www.hansfordsensors.com.cn

汉施弗德传感器（上海）有限公司

