


HS-SE-SRM 开关盒 带防护顶的不锈钢

主要特点

- BNC接插件和2针MS接插件输出
- 带防护顶可防止灰尘和尘土沉淀
- 提供一个通过便携式数据收集器从加速度计读取数据的端子
- 一拖多输出
- 易于安装

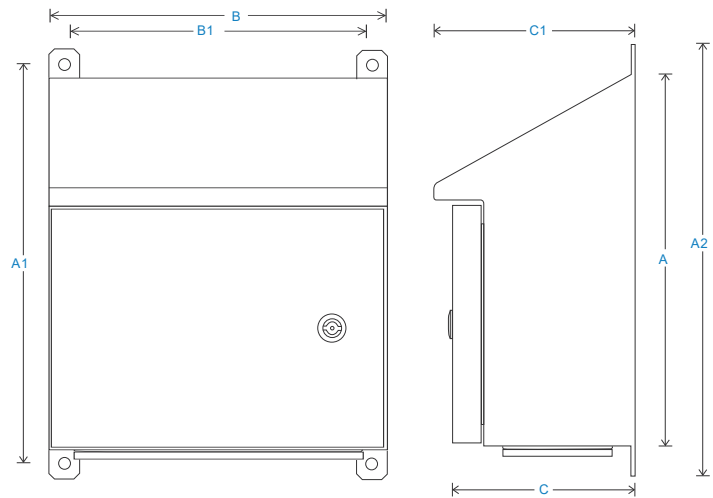

Technical Performance

| | | | |
|----------------|--|-----------|--|
| Inputs | Via accelerometer | Door | Lock and polyamide key |
| Output | BNC and 2 Pin MS as standard | Glanding | Glands supplied but not fitted |
| Mounting Board | PCB Panel | | Holes are punched for: |
| | (customisable upon request) | | Single input M12 - \varnothing 3.5-7mm cable |
| Material | 304 Stainless Steel (to be specified in options of 'How To Order' table) | | Single input M20 - \varnothing 7-13mm multi-core cable |
| | | | Multi input M20 - 3 x \varnothing 5.3mm |
| Dimensions | see: diagram | Labelling | Channel locations - other labelling available upon request |
| Termination | Spring-loaded terminal (no screwdriver required) | Mounting | supplied are 4 x Brackets |
| Sealing | IP66 | EMC | EN61326-1:2013 |

How To Order

