


HS-BE BNC 外壳 聚碳酸酯纤维材质

主要特点

- 提供一个通过便携式数据收集器从加速度计读取数据的端子
- 一拖多输出

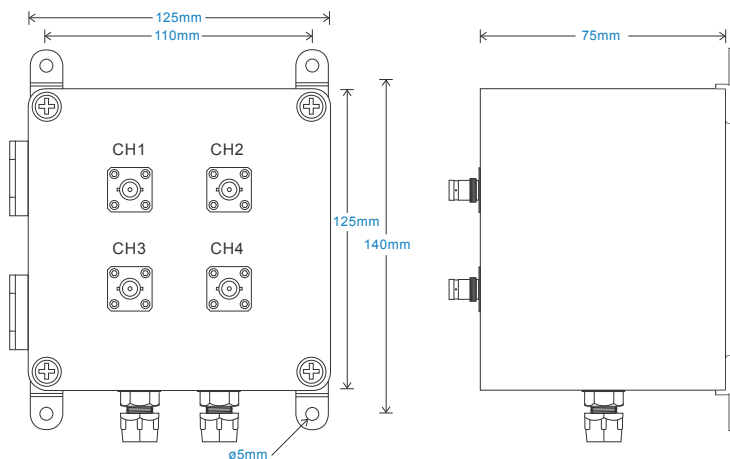

Technical Performance

Inputs	Via accelerometer	Glanding	Glands supplied and fitted
Output	BNC as standard (alternatives can be specified in 'How To Order' table)		Holes are punched for: Single input M12 - \varnothing 3.5-7mm cable
Material	Polycarbonate	Labelling	Screen printed channel identification
Dimensions	see: diagram	Mounting	supplied are 4 x Brackets
Sealing	IP55	EMC	EN61326-1:2013
Termination	PCB Mounted Screw Terminal		
Door	Hinged		

How To Order

